


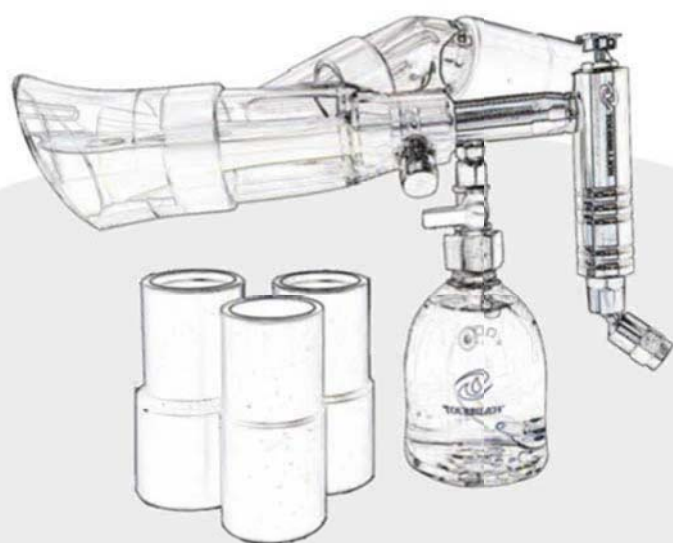

WHIRLWIND TOOLS CO., LTD.

TOURBILLION CLEANING GUNS

◇ Whirlwind Tools Co., Ltd. specialized in the excellent experiences and skills of the team members with best technology in car cleaning, we offer complete range of cleaning guns with “patent” for car cleaning application.

◇ **Multi-patent** **PATENT**

Taiwan, China, U.S.A. , Germany, France

◇ **Usage**



NEWLY DESIGNED EXTRACTOR

This is a newly developed circular Ø70mm extractor set. The product itself has three positions that can be rotated / changed in order to cope with the inconvenience of the small space encountered in actual use. It can be more flexible to avoid the obstacles caused by these spaces to achieve the effect of cleaning / vacuuming. It can also be used on Whirlwind's full series of WT-0100 & WT-0200 & TB-2014 & TB-2020 cleaning gun products.



ACCWT-0100BSR(PC)

► Where the dust collection pipe is connected can be rotated 360°.



► The front vacuuming port can be rotated 360°.



► The body of extractor can be rotated 90° left and right.



Whirlwind 2-in-1 Vacuum & Blow Tool WT-0183SNSSTBSR

This compact, lightweight 2-in-1 Vac-Blow Tool is designed for greater flexibility and maneuverability in confined spaces. Its high-speed rotational airflow effectively loosens and removes surface dirt. When paired with a transparent extractor, the vacuum's suction efficiently captures loosened dirt, preventing secondary contamination of the surrounding area.



Alternatively, removing the extractor converts the tool into a compact air blower. With the optional 100 mm extension tube, it is ideal for reaching deep or hard-to-access areas for dust removal and moisture drying.

Free speed: 5000 RPM.

Air Consumption: 280L/min(10 SCFM)

Dimension: 244*70*115mm


Net weight: 600 g

NEWLY DESIGNED EXTRACTOR SET

ACCWT-0200BS (PP)
PP Big Size Extractor Set




ACCWT-0200BS (PC)
PC Big Size Extractor Set

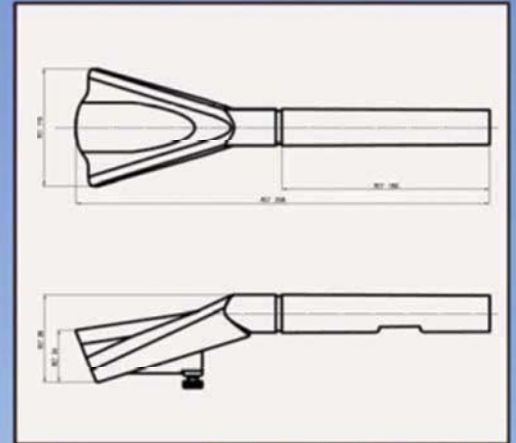

ACTB-2014BSS (PP)
PP Small Size Extractor Set





ACTB-2014BSS (PC)
PC Small Size Extractor Set

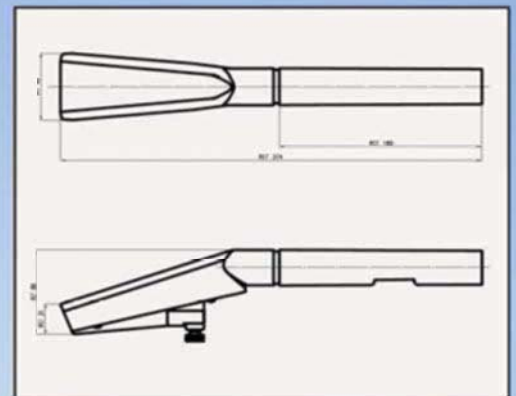

ACCWT-0100BSR (PP)
Newly Designed Extractor Set



ACCWT-0100BSR (PC)
Newly Designed Extractor Set

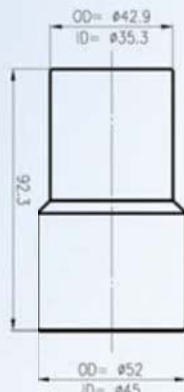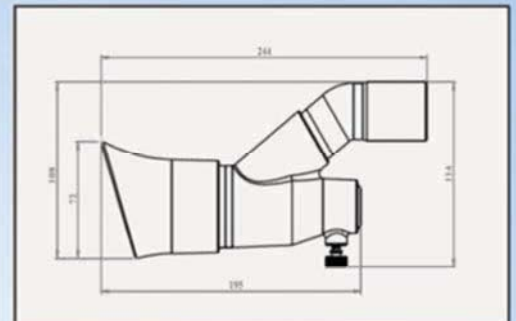

Elf Cleaning Gun

TBS-2020 & TBS-2020BSR & TBS-2014 and TBS-2014BSR are currently the smallest newly designed cleaning guns. We compare the newly designed cleaning gun with the standard version cleaninggun.

Their advantages are a 45% reduction in volume and a 60% reduction in weight (this weight is calculated when the bucket is filled with water).

They are lightweight and flexible. At the same time, they also adopt a new push button switch design.

It allows users use it very easily and flexibly in the car room or in a small space without any weight burden.



TBS-2020

Elf Advanced Ball Cleaning Gun



TBS-2020BSR

Elf Advanced Ball Cleaning Gun
with Newly Designed Extractor Set



TBS-2014

Elf Ball Cleaning Gun



TBS-2014BSR

Elf Ball Cleaning Gun with
Newly Designed Extractor Set



Specification

Item No.	TBS-2020	TBS-2020BSR	TBS-2014	TBS-2014BSR
Free Speed	5,500R.P.M.	5,500R.P.M.	8,000 R.P.M.	8,000 R.P.M
Air Inlet	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	260*70*185	275*70*230	260*70*185	275*70*230
Suggested Air Pressure	90Psi	90Psi	90Psi	90Psi
Net Weight	0.544Kg	0.975Kg	0.526Kg	0.957Kg
Average Air Consumption	9CFM	9CFM	9CFM	9CFM
Cup	300 c.c	300 c.c	300 c.c	300 c.c
Declaed Vibration Value, Ahd (n/s ²)	N/A	N/A	N/A	N/A
Uncertainty, K (m/s ²)	N/A	N/A	N/A	N/A
A-Weighted Soud Pressure Leavel at Workstation in dB (A)	N/A	N/A	N/A	N/A
A-Weighted Soud Pressure Leavel at Workstation in dB (A) (LPW)	N/A	N/A	N/A	N/A
A-Weighted Soud Pressure Leavel at Workstation in dB (A) (LPC)	N/A	N/A	N/A	N/A
C-Weighted Soud Pressure Leavel at Workstation in dB (A) (LPC)	N/A	N/A	N/A	N/A

Elf Cleaning Gun



WTS-0200A
Elf Metal Cleaning Gun



WTS-0200ABSR
Elf Metal Cleaning Gun with
Newly Designed Extractor Set



WTS-0100
WTS-0100S
Elf Classic Cleaning Gun
Elf Classic Cleaning Gun
with Stainless Steel Nozzle



WTS-0100SBSR
Elf Classic Cleaning Gun
with Stainless Steel Nozzle & Newly
Designed Extractor Set

Specification

Item No.	WTS-0200A	WTS-0200ABSR	WTS-0100 WTS-0100S	WTS-0100SBSR
Free Speed	8,000 R.P.M	8,000R.P.M.	3,700 R.P.M.	3,700 R.P.M.
Air Inlet	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	260*70*185	275*70*230	233*70*185	275*70*230
Suggested Air Pressure	90Psi	90Psi	90Psi	90Psi
Net Weight	0.519Kg	0.950Kg	0.432Kg	0.863Kg
Average Air Consumption	9CFM	9CFM	6CFM	6CFM
Cup	300c.c	300c.c	300c.c	300c.c
Declared Vibration Value Ahd (m/s ²)	N/A	N/A	N/A	N/A
Uncertainty, K (m/s ²)	N/A	N/A	N/A	N/A
A-Weighted Sound Pressure Level at Workstation in dB (A)	N/A	N/A	N/A	N/A
A-Weighted Sound Pressure Level at Workstation in dB (A) (LPW)	N/A	N/A	N/A	N/A
A-Weighted Sound Pressure Level at Workstation in dB (A) (LPC)	N/A	N/A	N/A	N/A
C-Weighted Sound Pressure Level at Workstation in dB (A) (LPC)	N/A	N/A	N/A	N/A

TOURBILLION CLEANING GUNS

TB-2020 ADVANCED BALL CLEANING GUN

- The stream of airflow generated by the high-speed rotation of the BALL is able to generate a frictional force on the inner wall of the Nozzle, make the BALL reduce the speed, and then generate more torque, so that this cleaning gun can enhance the cleaning power.

- 4 special blades are designed on the body of the BALL to generate a stream of airflow when the BALL rotates at high speed, which can prevent foreign objects from entering the Rotatable Set.



- Special Rotatable Set design allows Inner Tube Set will not break for 18 months.

- 4 special blades BALL design can reduce foreign objects entering the Rotatable Set when it uses with large or small Extractor.



TOURBILLION CLEANING GUNS

TB-2020

Advanced Ball Cleaning Gun



TB-2020BS

Advanced Ball Multi-Function
Blow Suction Gun with Big Size
Extractor Set



TB-2020NSBSR

Advanced Ball Blow Gun with
Newly Designed Extractor



TB-2020BSS

Advanced Ball Multi-Function
Blow Suction Gun with Small Size
Extractor Set



TB-2020BSR

Advanced Ball Cleaning Gun
with Newly Designed Extractor



Specification

Item No.	TB-2020	TB-2020BS	TB-2020BSS	TB-2020BSR	TB-2020NSBSR
Free Speed	5,500R.P.M.	5,500R.P.M.	5,500R.P.M.	5,500R.P.M.	5,500R.P.M.
Air Inlet	1/4"	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	330*120*240	360*120*275	360*70*275	330*120*275	290*70*210
Suggested Air Pressure	90Psi	90Psi	90Psi	90Psi	90Psi
Net Weight	0.7Kg	1.2Kg	1.1Kg	1.3Kg	0.9Kg
Average Air Consumption	9CFM	9CFM	9CFM	9CFM	9CFM
Cup	1L	1L	1L	1L	*
Declaed Vibration Value, Ahd (m/s ²)	1.1	1.1	1.1	2.5	1.9
Uncertainty, K (m/s ²)	0.6	0.55	0.55	0.74	0.69
A-Weighted Soud Pressure Lavel at Workstation in dB (A)	98.9	98.7	101.4	99.2	98.5
A-Weighted Soud Pressure Lavel at Workstation in dB (A) (LPW)	96.3	96.9	99.3	97.5	96.3
A-Weighted Soud Pressure Lavel at Workstation in dB (A) (LPC)	107.3	107.9	110.3	108.5	107.3
C-Weighted Soud Pressure Lavel at Workstation in dB (A) (LPC)	114.2	114.1	114.9	113.8	111.6

TOURBILLION CLEANING GUNS

TB-2020N

Advanced Ball Blow Gun



TB-2020NS

Advanced Ball Mini Blow Gun



TB-2020NHBS

Pistol Type Blow Suction Gun with Small Size Extractor Set



TB-2020NHBS

Pistol Type Blow Suction Gun with Big Size Extractor Set



TB-2020NBS

Straight Type Blow Suction Gun with Big Size Extractor Set



TB-2020NBSS

Straight Type Blow Suction Gun with Small Size Extractor Set



TB-2020SBS

Straight Type Blow Suction Gun with Big Size Extractor Set & Transparent Hose 5M



TB-2020SBSS

Straight Type Blow Suction Gun with Small Size Extractor Set & Transparent Hose 5M



Specification

Item No.	TB-2020N	TB-2020NS	TB-2020NHBS	TB-2020NHBS	TB-2020NBS	TB-2020NBSS	TB-2020SBS TB-2020SBSS
Free Speed	5,500 R.P.M.	5,500R.P.M.	5,500R.P.M.	5,500R.P.M.	5,500R.P.M.	5,500R.P.M.	5,500R.P.M.
Air Inlet	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	330*47*160	280*47*160	330*120*210	390*70*100	330*120*210	370*70*95	360*120 (70) * 130
Suggested Air Pressure	90Psi	90Psi	90Psi	90Psi	90Psi	90Psi	90Psi
Net Weight	0.5Kg	0.4Kg	0.65Kg	0.5Kg	0.75Kg	0.8Kg	1.05 / 0.95Kg
Average Air Consumption	9CFM	9CFM	9CFM	9CFM	9CFM	9CFM	9CFM
I.D. / O.D.	*	*	*	*	*	*	5*8mm
Hose	*	*	*	*	*	*	5M
Declared Vibration Value, Ahd (m/s ²)	1.52	1.42	*	*	*	*	*
Uncertainty, K (m/s ²)	0.65	0.64	*	*	*	*	*
A-Weighted sound pressure level at workstation in dB(A)(LPA)	97.0	98.7	*	*	*	*	*
A-Weighted sound pressure level at workstation in dB(A)	94.4	95.9	*	*	*	*	*
A-Weighted sound pressure level at workstation in dB(A)(LPW)	105.4	106.9	*	*	*	*	*
C-Weighted sound pressure level at workstation in dB(A)(LPC)	110.7	111.4	*	*	*	*	*

TOURBILLION CLEANING GUNS


◆ Rotatable Ball Technology Tube Set

TB-2014

TOURBILLION Ball Cleaning Gun



2 IN 1 CAP



TB-2014BS

Multi-Function Blow Suction Gun with Big Size Extractor Set



TB-2014BSS

Multi-Function Blow Suction Gun with Small Size Extractor Set



TB-2014NS

TOURBILLION Blow Mini Gun



TB-2014N

TOURBILLION Blow Gun



Specification

Item No.	TB-2014	TB-2014BS	TB-2014BSS	TB-2014N	TB-2014NS
Free Speed	8,000 R.P.M.	8,000 R.P.M.	8,000 R.P.M.	8,000 R.P.M.	8,000 R.P.M.
Air Inlet	1/4"	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	330*120*240	360*120*275	360*70*275		280*47*160
Suggested Air Pressure	90 PSI	90 PSI	90 PSI	90 PSI	90 PSI
Net Weight	0.7KG	1.2KG	1.1KG	0.5KG	0.4KG
Average Air Consumption	9 CFM	9 CFM	9 CFM	9 CFM	9 CFM
Cup	1L	1L	1L	*	*
Declared Vibration Value, Ahd (n/s ²)	1.44	1.44	1.44	1.07	1.07
Uncertainty, K (m/s ²)	0.64	0.64	0.64	0.6	0.6
A-Weighted sound pressure level at workstation in dB (A) (LPA)	89.4	91.5	91.5	95.9	95.9
A-Weighted sound pressure level at workstation in dB(A)	88.3	91.1	91.1	94.6	94.6
A-Weighted sound pressure level at workstation in dB (A) (LPW)	99.3	102.1	102.1	105.6	105.6
C-Weighted sound pressure level at workstation in dB (A) (LPC)	89.5	91.9	91.9	97.6	97.6

TOURBILLION CLEANING GUNS

TB-2014NBS

Straight Type Blow Suction Gun with
Big Size Extractor Set



TB-2014NBSS

Straight Type Blow Suction Gun with Small Size
Extractor Set



TB-2014SBS

Straight Type Blow Suction Gun with
Big Size Extractor Set & Transpaient
Hose 5M



TB-2014SBSS

Straight Type Blow Suction Gun with
Small Size Extractor Set & Transparent
Hose 5M



TB-2014RA Glazing Gun



Specification

Item No.	TB-2014NBS	TB-2014NBSS	TB-2014SBS / TB-2014SBSS	TB-2014RA
Free Speed	8,000R.P.M.	8,000R.P.M.	8,000R.P.M.	8,000R.P.M.
Air Inlet	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	355*120*100	370*70*95	360*120(70)*130	280*90*190
Suggested Air Pressure	90PSI	90PSI	90PSI	90PSI
Net Weight	0.75KG	0.8KG	1.05/0.95KG	0.7KG
Average Air Consumption	9 CFM	9 CFM	9 CFM	9 CFM
I.D. / O.D.	*	*	5*8mm	*
Hose	*	*	5M	*
CUP	*	*	*	250c.c

TOURBILLION CLEANING GUNS

TB-2014NHBS

Pistol Type Blow Suction Gun with Big Size Extractor Set



TB-2014NHBS

Pistol Type Blow Suction Gun with Small Size Extractor Set



TB-2014RNBS


Ball Type Blow Suction Gun Double Action



TB-2014L

Engine Cleaning Gun

360MM

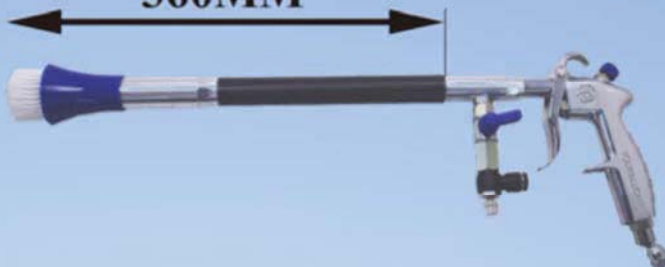

TB-2014LT

Engine Cleaning Gun



Specification

Item No.	TB-2014NHBS	TB-2014NHBS	TB-2014RNBS	TB-2014L	TB-2014LT
Free Speed	8,000 R.P.M.	8,000 R.P.M.	4,000 R.P.M.	8,000 R.P.M.	8,000 R.P.M.
Air Inlet	1/4"	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	330*120*210	390*58*100	390*58*100	360*120*130	510*120*240
Suggested Air Pressure	90PSI	90PSI	90PSI	90PSI	90PSI
Net Weight	0.65KG	0.5KG	0.5KG	0.93KG	0.6KG
Average Air Consumption	9CFM	9CFM	9CFM	9CFM	9CFM
Hose	*	*	5M	*	*
Cup	*	*	*	*	1L
Declared Vibration Value, Ahl (m/s ²)	1.44	1.44	*	*	*
Uncertainty, K (m/s ²)	0.64	0.64	*	*	*
A-Weighted sound pressure level at workstation in dB (A) (LPA)	91.5	91.5	*	*	*
A-Weighted sound pressure level at workstation in dB (A)	91.1	91.1	*	*	*
A-Weighted sound pressure level at workstation in dB (A) (LPW)	102.1	102.1	*	*	*
A-Weighted sound pressure level at workstation in dB (A) (LPC)	91.9	91.9	*	*	*

TOURBILLION CLEANING GUNS

ACWT-0200A



◆ Rotatable Metal Tube Set

Remark:

This upgrade Kit fits all Tornado and Cyclone cleaning tools such as Z-010 Tornado Classic, AZ-020K Tornado Black, Z-014 Blow Gun, AZ-020K and Many Other "Tornado" Style Tools.

WT-0200A

TOURBILLION Metal
Cleaning Gun



WT-0200AN

TOURBILLION Metal
Blow Gun with Brush



WT-0200ANS

TOURBILLION Metal Mini
Blow Gun with Brush



WT-0200ABS

Metal Multi-Function Blow Suction Gun
with Big Size Extractor Set



WT-0200ABSS

Metal Multi-Function Blow Suction Gun
with Small Size Extractor Set



Specification

Item No.	WT-0200A	WT-0200AN	WT-0200ANS	WT-0200ABS	WT-0200ABSS
Free Speed	8,000R.P.M.	8,000R.P.M.	8,000R.P.M.	8,000R.P.M.	8,000R.P.M.
Air Inlet	1/4"	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	330*120*240	330*47*160	280*47*160	360*120*275	360*70*275
Suggested Air Pressure	90 PSI	90 PSI	90 PSI	90 PSI	90 PSI
Net Weight	0.7KG	0.5KG	0.4KG	1.2KG	1.1KG
Average Air Consumption	9CFM	9CFM	9CFM	9CFM	9CFM
Cup	1L	*	*	1L	1L
Declared Vibration Value, Ahd (m/s ²)	3.59	6.67	6.67	3.59	3.59
Uncertainty, K(m/s ²)	0.895	1.16	1.16	0.895	0.895
A-Weighted sound pressure level at workstation in dB (A) (LPA)	91.4	96.6	96.6	91.4	91.4
A-Weighted sound pressure level at workstation in dB (A) (LPW)	102.4	107.6	107.6	102.4	102.4
C-Weighted sound pressure level at workstation in dB (A) (LPC)	96.3	102	102	96.3	96.3

TOURBILLION CLEANING GUNS

◆ Rotatable Tube Set

WT-0100

Classic Cleaning Gun



WT-0100S

Classic Cleaning Gun with Stainless Steel Nozzle



WT-0100SBSR

Classic Cleaning Gun with Stainless Steel Nozzle & Newly Designed Extractor Set



WT-0100SNSBSR

Classic Blow Gun with Stainless Steel Nozzle & Newly Designed Extractor Set



WT-0100US

Classic Cleaning Gun with Nozzle Brush



Specification

Item No.	WT-0100	WT-0100S	WT-0100SBSR	WT-0100SNSBSR	WT-0100US
Free Speed	3,000R.P.M.	3,000R.P.M.	3,000R.P.M.	3,000R.P.M.	3,000R.P.M.
Air Inlet	1/4"	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	305*120*240	305*120*240	330*120*275	290*70*210	330*120*240
Suggested Air Pressure	90Psi	90Psi	90Psi	90Psi	90Psi
Net Weight	0.61Kg	0.61Kg	1.2Kg	0.8Kg	0.61Kg
Average Air Consumption	6CFM	6CFM	6CFM	6CFM	6CFM
Declared Vibration Value, Ahd (m/s ²)	0.41	0.41	0.7	3.1	0.41
Uncertainty, K (m/s ²)	0.54	0.54	0.50	0.8	0.54
A-Weighted sound pressure level at workstation in dB (A) (LPA)	84.3	84.3	92.2	100.1	84.3
A-Weighted sound pressure level at workstation in dB (A) (LPW)	95.3	95.3	90.4	98.	95.3
C-Weighted sound pressure level at workstation in dB (A) (LPC)	89.3	89.3	101.4	105.1	89.3

TOURBILLION CLEANING GUNS

WT-0100NS/SNS

Classic Mini Blow Gun / Classic Mini Blow Gun with Stainless Steel Nozzle



WT-0100N/SN

Classic Blow Gun / Classic Blow Gun with Stainless Steel Nozzle



WT-0100USD

Professional Cleaning Gun with Nozzle Brush



Item No.	WT-0100NS WT-0100SNS	WT-0100N WT-0100SN	WT-0100USD
Free Speed	3,000R.P.M.	3,000R.P.M.	3,600R.P.M.
Air Inlet	1/4"	1/4"	1/4"
L*W*H (mm)	235*43*160	305*43*160	305*50*50
Suggested Air Pressure	90Psi	90Psi	90Psi
Net Weight	0.375Kg	0.4Kg	0.62Kg
Average Air Consumption	6CFM	6CFM	6CFM
Declared Vibration Value, Ahd (m/s ²)	2.99	2.99	*
Uncertainty, K (m/s ²)	0.79	0.79	*
A-Weighted sound pressure level at workstation in dB (A) (LPA)	93.1	93.1	*
A-Weighted sound pressure level at workstation in dB (A) (LPW)	104.1	104.1	*
C-Weighted sound pressure level at workstation in dB (A) (LPC)	98.3	98.3	*

Foam Generating

WT-0300

Foam Gun



◆ Apparatus



Item No.	WT-0300(1L)
Air Inlet	1/4"
L*W*H (mm)	295*120*260
Suggested Air Pressure	90Psi
Net Weight	0.8Kg
Average Air Consumption	13 CFM
Cup	1L
Double Hose	*



AIA-0001
360° X 360°



AIA-0003
360° X 110°



AIA-0002
360° X 35°

Item No.	AIA-0001	AIA-0002	AIA-0003
Size	PT / PS / MPT	PT / PS / NPT	PT / PS / NPT
Air Inlet	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"

Swing Type Blow Gun

The Swing Type Plastic Nozzle enables the internal PU tube to swing rapidly from side to side, creating a wide, fan-shaped airflow for cleaning larger areas. Specially designed for tight and confined spaces, it can also be adjusted to various angles for parallel or vertical air blowing. The powerful airflow ensures highly efficient cleaning, effectively removing dirt, dust, and debris from every corner of a vehicle. Achieve a thorough clean quickly and efficiently



099 043126 4H0
Swing Type Plastic Nozzle



WT-0100NSSLR
Plam-Grip Blow Gun with Swing Nozzle



WT-0183LR
Pocket Hurricane Gun With Swing Nozzle



WT-0100NLR
Classic Blow Gun With Swing Nozzle



WT-0100NSLR
Classic Mini Blow Gun With Swing Nozzle



WT-0100NLRBS
Classic Blow Gun With Swing Nozzle
& Newly Designed Extractor Set



WTS-0100NLRBSR
Elf Blow Gun With Swing Nozzle
& Newly Designed Extractor Set

Specification

ITEM NO:	WT-0100NSSLR	WT-0183LR	WT-0100NLR	WT-0100NSLR	WT-0100NLRBSR	WTS-0100NLRBSR
Free Speed:	4,000R.P.M.	3,000L.P.M.	3,600R.P.M.	3,600R.P.M.	4000R.P.M.	4,000R.P.M.
Air Inlet:	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
L*W*H(mm)	156*43*104	165*41*36	305*43*160	235*43*160	290*70*210	275*70*
Sug.Air Pressure:	90Psi	90Psi	90Psi	90Psi	90Psi	90Psi
Net Weight:	171g	71g	400g	375g	830g	800g
Avg.Air Consump.:	6SCFM	6SCFM	6SCFM	6SCFM	6SCFM	6SCFM

Viper Flex Type Air Blow Gun

This dust-blowing tool features a 30 cm flexible air tube that can bend and hold its shape through 360°, making it suitable for cleaning dust in hard-to-reach spaces and at angles that conventional blow guns cannot access.

It can be fitted with Ø43 mm and Ø32 mm round nozzles, as well as a side-to-side swivelling nozzle, to suit different cleaning conditions.

- Ø43 mm round nozzle: Ideal for blowing dust across large areas.
- Ø32 mm round nozzle: Concentrates the airflow for deeper or longer-distance dust removal.
- 43 mm flat nozzle: Ideal for blowing dust in narrow spaces.

WT-0100NDSSS

Classic Viper Flex Blow Gun
(Ø32mm Nozzle)




WT-0100NSSSD

Plam-Shaped
Viper Flex Blow Gun
(Ø32mm Nozzle)



WT-0100NDSS

Classic Viper Flex Blow Gun
(Ø43mm Nozzle)

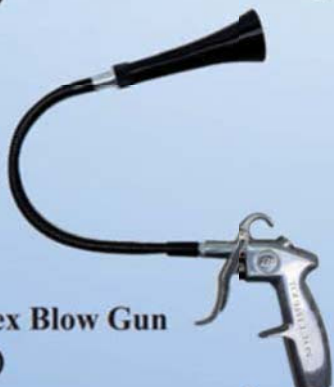

WT-0100NSSD

Plam-Shaped
ViperFlex Blow Gun (Ø43mm Nozzle)



WT-0100NDLR

Classic Viper Flex Blow Gun
(Swing Type Nozzle)



WT-0100NLRD

Plam-Shaped Viper
Flex Blow Gun(Swing Type Nozzle)




WT-0183AFMA

Mini Type Air Duster Viper Flex Blow Gun




ITEM NO:	WT-0100NDSS	WT-0100NDSSS	WT-0100NDLR	WT-0100NSSD	WT-0100NSSSD	WT-0100NLRD	WT-0183AFMA
Free Speed:	4,500R.P.M.	4,500R.P.M.	3,600R.P.M.	4,500R.P.M.	4,500R.P.M.	4,000R.P.M.	N/A
Air Inlet:	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
L*W*H(mm):	540*43*160	540*32*160	540*43*160	465*43*104	465*32*104	465*43*104	340*22*36
Sug Air Pressure:	90PSI	90PSI	90PSI	90PSI	90PSI	90PSI	90PSI
Net Weight:	0.4kgs	0.4kgs	0.4kgs	0.3kgs	0.3kgs	0.3kgs	0.094kgs
Avg.Air Consump:	8 SCFM	8 SCFM	8 SCFM	8 SCFM	8 SCFM	8 SCFM	N/A

Plam-Grip Blow Gun

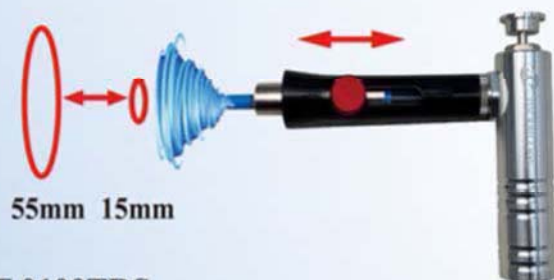

WT-0100TRS
Palm-grip Blow Gun with Adjustable Rotation
Diameter (Ø23mm Nozzle)

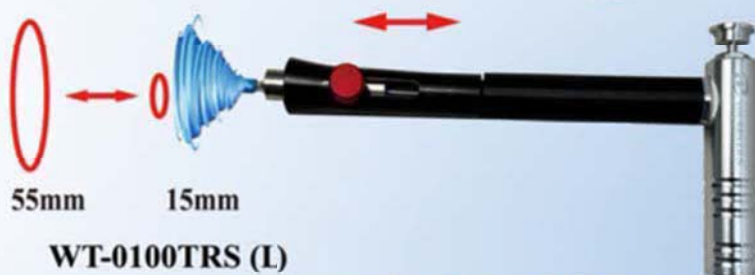

WT-0100TRS (L)
Palm-grip Blow Gun with Adjustable Rotation
Diameter and Interchangeable Extension-type
(Ø23mm Nozzle)

WT-0100NSS
Palm-grip Blow Gun (Ø43mm Nozzle)



WT-0100NSS
Palm-grip Blow Gun (Ø32mm Nozzle)
Schematic Diagram of Installing the Extension Rod



WT-0100NSST
Palm-grip Blow Gun Plus
(Ø43mm Nozzle)



100mm Extension Rod For
WT-0100NSST & WT-0100NSSST



WT-0100NSSST
Palm-grip Blow Gun Plus
(Ø32mm Nozzle)



Specification

Item No.	WT-0100NSS	WT-0100NSST	WT-0100NSSS	WT-0100NSSST	WT-0100TRS	WT-0100TRS(L)
Free Speed	5,500R.P.M.	5,500R.P.M.	5,500 R.P.M.	5,500 R.P.M	4,000~8,000 R.P.M	3,500~7,000 R.P.M
Free Speed Rotation Diameter (10mm distance from cleaning objects)	N/A	N/A	N/A	N/A	15~55mm	15~55mm
Air Inlet	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	156*43*104	171*43*104	171*32*104	171*32*104	150*25*104	250*25*104
Suggested Air Pressure	90Psi	90Psi	90Psi	90Psi	90Psi	90Psi
Net Weight	171g	178g	177g	168g	183g	203g
Average Air Consumption	170L/min (6 SCFM)	170L/min (6 SCFM)	170L/min (6 SCFM)	170L/min (6 SCFM)	170L/min (6 SCFM)	170L/min (6 SCFM)
Declaed Vibration Value, Ahd (m/s ²)	3.7	3.7	3.7	N/A	1	N/A
Uncertainty, K (m/s ²)	0.86	0.86	N/A	N/A	0.59	N/A
A-Weighted Soudb Pressure Leavel at Workstation in dB (A)(LPA)	100.7	100.7	N/A	N/A	93.7	N/A
A-Weighted Soudb Pressure Leavel in dB (A) (LPA)	98.1	98.1	N/A	N/A	90.1	N/A
A-Weighted Soudb Power Leavel in dB (A) (LW _a)	109.1	109.1	N/A	N/A	101.1	N/A
C-Weighted Soudb Pressure Leavel at Workstation in dB (A) (LPA)	116.6	116.6	N/A	N/A	112.5	N/A

Pocket Hurricane Gun Plus



WT-0183NSST
Size : Ø43 x 183mm
Net Weight : 111g
R.P.M.: 5,000



WT-0183NSSST
Size : Ø32 x 183mm
Net Weight : 116g
R.P.M.: 5,000



WT-0186NSST
Size : Ø43 x 238mm
Net Weight : 160g
R.P.M.: 5,000



WT-0186NSSST
Size : Ø32 x 228mm
Net Weight : 164g
R.P.M.: 5,000



100mm Extension Rod For
WT-0183NSST & WT-0183NSSST
WT-0186NSST & WT-0186NSSST



WT-0183TRS
Size: Ø23 x 168mm
Net Weight : 126g
R.P.M.: 4,000~8,000



WT-0186TRS(L)
Size : Ø23 x 268mm
Net Weight : 152g
R.P.M.: 4,000~8,000



WT-0186TRS
Size : Ø23 x 223mm
Net Weight : 175g
R.P.M.: 4,000~8,000



WT-0186TRS(L)
Size : Ø23 x 323mm
Net Weight : 200g
R.P.M.: 4,000~8,000

OTHER CLEANING GUNS

WT-0500A
Power Gun



WT-0500
Power Gun



WT-0502
Soda Gun



WT-0501
Dry Flake Gun



Specification


Item No.	WT-0500A	WT-0500	WT-0501	WT-0502
Air Inlet	1/4"	1/4"	1/4"	1/4"
L*W*H(mm)	165*25*160	165*25*170	200*65*160	200*120*240
Noise	102.9dB	102.9dB	90.5dB	92.7dB
Suggested Air Pressure	90PSI	90PSI	90PSI	90PSI
Net Weight	0.4KG	0.4KG	0.4KG	0.6KG

Mini type Air duster




WT-5183

Mini type air duster W /Adjust knob




WT-5183A

Mini type air duster W /Adjust knob

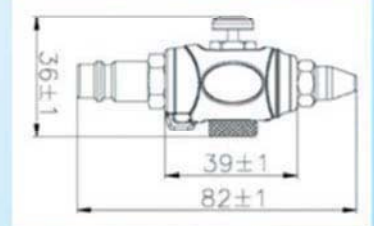


WT-5185A

Mini type air duster W /Adjust knob



WT-5186A

Mini type air duster W/Flow control knob

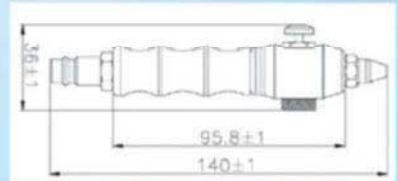

SN-FMA0300 Flexible tube / 300mm



EXN-1750709

175mmL W/adapter




SN-3AC

Concentration Nozzle



SN-3AF

Flat Nozzle



SN-3AL

Side Nozzle



SN-MR 25mm

Rubler Nozzle



SN-SC Nozzle



SN-SC Nozzle



SN-LR 35mm

Rubber Nozzle



SN-TSV 63mmL

Tilted Soft Nozzle
(TPV)



SN-2L Mini Type

High Flow Nozzle
(Aluminum)



SN-1L Mini Type High

Flow Nozzle(PA)

Specification

Item No.	WT-5183	WT-5183A	WT-5185A	WT-5186A
Working pressure	0.9Mpa (8.8Bar, 128psi ,9kgf/cm2)	1.2Mpa (13Bar, 170psi ,12kgf/cm2)	1.2Mpa (13Bar, 170psi ,12kgf/cm2)	0.78Mpa (7.8Bar, 114psi ,8kgf/cm2)
Air Inlet	1/4"	1/4"	1/4"	1/4"
L*W*H (mm)	88*23*34	82*23*36	82*23*36mm	140*23*36mm
Suggested Air Pressure	90Psi	90Psi	90Psi	90Psi
Net Weight	53g	59g	70g	80 g
Average Air Consumption	18.27 CFM(517.4 L/min)	17.15 CFM(485.6 L/min)	16.33 CFM(462.4 L/min)	15.25 CFM(431.8 L/min)

AIR KNIFE BLOW GUN

Different from General Blow Guns Blow Gas Shape is Round and Smaller Area.

Air Knife Blow Guns Blow Gas Shape is Rectangle (flat) Type, Provide a Larger Area of the Gas Blowing Dust.

Its Noise Level is Lower than Traditional Blow Gun.

It is able to Use Different Size of Brush to Increase the Effect of Cleaning.

WT-0510

Air Knife Blow Gun



WT-0510A2

(Soft Brush, Size: Ø 0.2*2cm)



WT-0510B4

(Hard Brush, Size: Ø 0.4*2cm)



WT-0510C4

(Hard Brush, Size: Ø 0.4*1cm)



WT-0510S

Air Knife Blow Gun



WT-0510SA2

Air Knife Blow Gun with Soft Brush Ø0.2*20mm)



WT-0510SB4

Air Knife Blow Gun with Soft Brush Ø0.2*20mm)



WT-0510SC4

Air Knife Blow Gun with Soft Brush Ø0.4*10mm)



Specification

Item No.	WT-0510	WT-0510A2	WT-0510B4	WT-0510C4	WT-0510S	WT-0510SA2	WT-0510SB4	WT-0510SC4
Average Air Consumption	25CFM	25CFM	25CFM	215CFM	35CFM	35CFM	35CFM	35CFM
Air Inlet	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
L*W*H(mm)	205*24*175	225*24*175	225*24*175	207*24*175	130*46*23	130*46*23	150*46*23	140*46*23
Suggested Air Pressure	90PSI	90PSI	90PSI	90PSI	90PSI	90PSI	90PSI	90PSI
Net Weight	0.3KG	0.3KG	0.3KG	0.3KG	0.075KG	0.075KG	0.075KG	0.075KG

Foam Cannon

**Patent No.
US 8950691**

Made in Taiwan



FAN-240110
JET Size : 1.1mm (Low Pressure)
Body: Stainless Steel
Cup:1000cc
Use Pressure : 1595 psi (110 bar) Under

FAN-240125
JET Size : 1.25mm (High Pressure)
Body: Stainless Steel
Cup:1000cc
Use Pressure : 1595 psi (110 bar) ~2176 psi (150 bar)

Pump Foam Jet	Jet Stream Pump
HFN-250327	HFN-250328
Cup : 1500 cc	Cup : 1500 cc
Maximum bearing pressure 40 psi	Maximum bearing pressure 40 psi

Demo:



Demo:



Foam Special part



Installation location and method




Installation location and method




WF-1030 FOAM SPRAYER



Photo 1

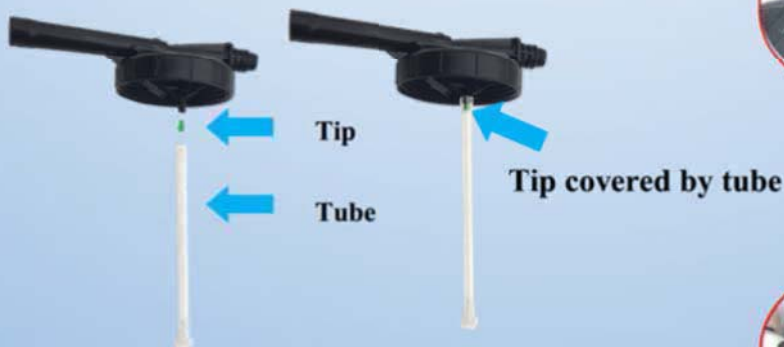

Three Colour Tip

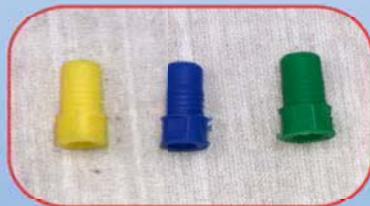

Operation:

1. Fill container with your wash detergent. If you are using concentrate, please dilute according to the right ratio.
2. Select a tip by colour based on your water pressure.
 - A. Yellow – High water pressure
 - B. Blue – Medium water pressure
 - C. Green – Low water pressure
 - D. No tip – Very low water pressure
3. Insert colored tip firmly into the center hole on the bottom of the lid. Then insert the tube into central hole on the bottom of lid. (As photo 1.)
4. Screw the lid and detergent container firmly. Attach the spray nozzle with grip and you are ready to foam.
5. The pistol grip also can be used independently as water nozzle.

Please clean the foam sprayer thoroughly after every use to ensure the performance.

Warning:

- Wear protective equipment while operating.
- Connect only to tap water outlets (80PSI maximum).
- Please follow safety instruction from your chemical / detergent supplier.


FOAM SPRAYER

WF-1031

Professional Car Wash Foamer Gun



Dilution Ratios

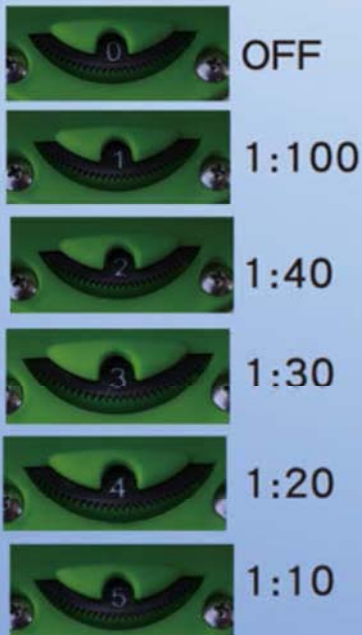

FOAM SPRAYER

WF-1031B

Professional Car Wash Foamer Gun

Machined Brass Fitting



Removable Nozzle



Brass Quick Connect:

Pull back to disconnect

Brass Quick Connect:

Switch from water nozzle to foam gun effortlessly.

Flexible Rubber Grip:

Comfortable and durable.



Precision Fit Filter Washer

Leak-free connection

Durable Metal Body

Dilution Ratios



OFF



1:40



1:20



1:100



1:30



1:10



CLAY SHEET

Immaculate Removal of Stubborn Contaminants. Benefit from the CLAY SHEET'S ability to meticulously lift away the stubborn contaminants that have bonded with your car's paint.



Optimal Preparation for Wax and Sealants. The Clay Sheet doesn't just clean; it prepares your car for greatness.



No residue of clay pieces remained or stocked when cleaning the narrow gap.



Perfect form and condition to apply in any situations.



Double side usage for all colour paint application.



Simplified and Safer Polishing and Detailing.



Restoration of a Smooth, Glossy Finish.



Super economy!

Private
labelling
available



The contamination referred here can be:

- industrial fallout
- honeydew
- rail dust
- tree sap
- and bitumen tar

CS-120802



Specification:

- 12x8cm
- 40g
- 0.2cm

CLAY PRODUCT

Clay is Import 100% From Japan, Made In Taiwan

Features:

- * **High Quality**
- * **Clay won't be come down**
- * **There are 5-7 Layers of Clay on the Products**
- * **No Any Stick On Car Body After Used**
- * **No Any Complaints From the End-Users**


Yellow-Medium Grade (for Heavy Contaminated Paint & Light Color Paint)

Blue-Fine Grade (For New Car & Dark Color Paint)

ACCP-0601 (Blue 6")

ACCP-0601 (Blue 5")


Clay Pad



ACCP-0601 (Yellow 6")

ACCP-0601 (Yellow 5")

Clay Pad



ACWM-0601 (Blue)

Wash Mitt



ACCH-30301 (Blue 30*30cm)

ACCP-30302 (Yellow 30*30cm)

Clay Cloth



ACWM-6001 (Yellow)

Wash Mitt



ACCE-0501 (Black, Medium)

ACCE-0502 (Blue, Fine)

Clay Eraser (Sponge)



ULTRA COMPACT ANGLE IMPACT WRENCH

IWA-1882



IWA-2882HR

Loosen these two screws, you can adjust the required angle of head and handle, then tighten.



IWA-1882HR

- The handle can be rotated at a angle of 45°, there are total 8 angles can be chosen for the direction of the trigger. The user able to use in a narrow space as desired.
- 360° exhaust dust, adjustable at the handle.

PLAM-SHAPED IMPACT WRENCH

IWA-1082RSS

Design come with safety trigger and the trigger can be turn to right or left side, so both hand can be use.



360°



IMPACT WRENCH

IWA-1882

1/2" Ultra Compact Angle Air Impact Wrench



IWA-1882HR

1/2" Ultra Compact Angle Air Impact Wrench
Rotatable Handle



IWA-2882HR

1/2" Ultra Compact Angle Air Impact Wrench
Rotatable Handle



IWA-1082RSS

1/2" Palm-Shaped Air Impact Wrench



Specification

Item No.	IWA-1882	IWA-1882HR	IWA-2882HR	IWA-1082RSS
Free Speed	9,000R.P.M	9,000R.P.M	9,000R.P.M	8,500R.P.M
Max.Torque	450 ft-lb / 610 N.m	450 ft-lb / 610 N.m	450 ft-lb / 610 N.m	400 ft-lb / 610 N.m
Clutch type	Jumbo Hammer	Jumbo Hammer	Jumbo Hammer	Jumbo Hammer
Air Inlet	1/4"	1/4"	1/4"	1/4"
Height (from end to end)	260mm	260mm	310mm	115mm
Length (from end to end)	88mm	88mm	88mm	88mm
Anvil	1/2"	1/2"	1/2"	1/2"
Avg.Air Consump.	8.0CFM	8.0CFM	8.0CFM	5.6CFM
Noise Level(sound pressure)	83dB	83dB	83dB	93.8dB
Sug.Air Pressure	90 Psi	90 Psi	90 Psi	90 Psi
Net Weight	1.25Kg	1.4 Kg	1.5 Kg	1.15Kg

MINI IMPACT WRENCH

IWA-224230

1/2" Mini Air Impact Wrench



IWA-224231

1/2" Mini Air Impact Wrench



IWA-224232

1/2" Mini Air Impact Wrench



IWA-224234

1/2" Mini Air Impact Wrench



IWA-224235

1/2" Mini Air Impact Wrench



Specification

Item No.	IWA-224230	IWA-224231	IWA-224232	IWA-224234	IWA-224235
Free Speed	10,000R.P.M	9,000R.P.M	9,000R.P.M	12,000R.P.M	9,000R.P.M
Max.Torque	500 ft-lb / 678 N.m	500 ft-lb / 678 N.m	450 ft-lb / 610 N.m	750 ft-lb / 1017 N.m	800 ft-lb / 1085 N.m
Clutch type	Jumbo Hammer	Jumbo Hammer	Jumbo Hammer	Twin Hammer	Jumbo Hammer
Air Inlet	1/4"	1/4"	1/4"	1/4"	1/4"
Length (from end to end)	97mm	93mm	88mm	107mm	126mm
Anvil	1/2"	1/2"	1/2"	1/2"	1/2"
Avg.Air Consump.	7CFM	7CFM	7CFM	6CFM	8CFM
Sug.Air Pressure	90Psi	90Psi	90Psi	90Psi	90Psi
Net Weight	1.36Kg	1.3Kg	1.25Kg	1.4Kg	1.8Kg

AIR PENCIL GRINDER

IWM-223000

3mm / 6mm Air Pencil Grinder



IWM-226000

3mm Air Pencil Grinder



Specification

Item No.	IWM-223000	IWM-226000
Free Speed	0-30,000 R.P.M	0-60,000 E.P.M
Collet Size	3mm / 6mm	3mm
Mini Hose Size	3/8"	3/8"
Air Inlet	1/4"	1/4"
Length (from end to end)	150mm	150mm
Sug. Air Pressure	90 Psi	90 Psi
Net Weight	0.38Kg	0.28Kg

IMPACT WRENCH & NEEDLE SCALER

IWA-221191L6

1" Air Impact Wrench



Specification

Item No.	IWA-221191L6
Free Speed	7,500 R.P.M
Max. Torque	1800 ft-lb / 2440 N.m
Clutch type	Twin Hammer
Air Inlet	3/8"
Height (from end to end)	115mm
Length (from end to end)	442mm
Anvil	1"
Avg. Air Consum.	21.2 CFM
Sug. Air Pressure	90 Psi
Net Weight	5.4Kg

HME-223350Y

Composite Air Needle Scaler



Specification

Item No.	HME-223350Y
Free Speed	4,300 B.P.M
Needle size and quantity	3mmx180mm, 19pcs
Stroke	38mm
Air Consumption	10 CFM
Noise Power / Pressure	107.1/96.1dB
Air Inlet	1/4"
Length (from end to end)	335mm
Sug. Air Pressure	90 Psi
Net Weight	1.8Kg

AIR SANDER

SDC-8360

(Aluminum Body)
3" Random Orbital Sander



SDC-3551 & SDC-3651

(Aluminum Body)
5" & 6" Random Orbital Sander
(No-Vacuun)



SDC-3570 & SDC-3670

(Aluminum Body)
5" & 6" Random Orbital Sander
(Central-Vacuun)



SDC-3561 & SDC-3660

(Aluminum Body)
5" & 6" Random Orbital Sander
(Self-Vacuun)



SDC-1530

3" Palm Random
Orbital Sander



SDC-4530

3" Light Weight Lower
speed Palm Sander



Specification

Item No.	SDC-8630 (Aluminum Body)	SDC-3551 & SDC-3651 (Aluminum Body)
Free Speed	12,000 R.P.M.	12,000 R.P.M.
Pad Size	3" (75mm)	5" (127mm) & 6" (152mm)
Diameter Orbital	5/8" (15mm)	3/16" (8mm)
Noise Level	83dBA	83dBA
Vibration	N/A	N/A
Air Inlet	1/4"	1/4"
Average Air Consumption	530 l/min	530 l/min
Suggested Air Pressure	90PSI	90PSI
Net Weight	0.87KG	0.95KG

Item No.	SDC-3570 & SDC-3670 (Aluminum Body)	SDC-3561 & SDC-3660 (Aluminum Body)	SDC-1530	SDC-4530
Free Speed	11,000 R.P.M.	11,000 R.P.M.	12,000 R.P.M.	2,500 R.P.M.
Pad Size	3" (127mm) & 6" (152mm)	5" (127mm) & 6" (152mm)	3" (75mm)	3" (75mm)
Diameter Orbital	3/16" (8mm)	3/16" (8mm)	2.5mm	N/A
Noise Level	83dBA	83dBA	80dBA	80dBA
Vibration	N/A	N/A	N/A	N/A
Air Inlet	1/4"	1/4"	1/4"	1/4"
Average Air Consumption	530 l/min	530 l/min	500 l/min	112 l/min
Suggested Air Pressure	90PSI	90PSI	90PSI	90PSI
Net Weight	0.99KG	0.99KG	0.56KG	0.66KG

AIR SANDER & POLISHER

SDC-1220

2" Spot Repair Sander



SDC-1331

3" Air composite Random Orbital Sander



SDC-4230

3" Sander W / Disc Pad & Sanding Pad



SDC-4322

Air Composite Polisher



SDC-4331

3" Sander W / Disc Pad & Sanding Pad



SDC-4351

5" High Speed Sander



SDC-1220K

2" Spot Repair Sander Kit



SDC-1331K

3" Air Composite Random Orbital Sander Kit



SDC-4332K

3" Air Composite Polisher Kit



Specification

Item No.	SDC-1220	SDC-1331	SDC-4230	SDC-4322	SDC-4331	SDC-4351
Free Speed	13,000R.P.M.	18,000R.P.M.	15,000R.P.M.	2,200R.P.M.	18,000R.P.M.	18,000R.P.M.
Pad Size	2" (51mm)	3" (75mm)	2" (51mm)	3" (75mm)	3" (75mm)	5" (127mm)
Diameter Orbital	2mm	3mm	N/A	N/A	N/A	N/A
Average Air Consumption	2.6CFM	3.5CFM	3.1CFM	3.5CFM	1.5CFM	3.5CFM
Air Inlet	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Suggested Air Pressure	90PSI	90PSI	90PSI	90PSI	90PSI	90PSI
Net Weight	0.5KG	0.72KG	0.7KG	0.77KG	0.7KG	1.3KG

MULTI-COLORED MACHINE POLISHING LAMP ASSEMBLY

LWL-1963L


Patents : United States: US10,753,587 B1

Gerbrauchsmusters Nr:20 2020 101 584

Japan : 3226892

Taiwan Patent Number : M584398

China: ZL 20192 1233053.2

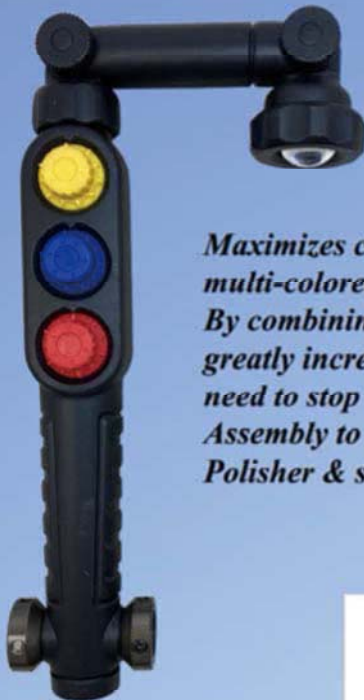

Maximizes correction results whilst increasing efficiency by utilizing the broad spectrum of multi-colored LED light to expose defects on painted surfaces prior-to & whilst polishing. By combining various wave lengths of light & matching then with the specific color of the paint greatly increases the ability to see & refine defects as you polish. This maximizes efficiency as the need to stop & re-inspect after each pass is reduced. Simply Attach the new Multi-colored Lamp Assembly to any Dual Action, Rotary or Forced Action Machine. Polisher & start removing defects on all paint types with more accuracy & precision.



TRI-Color of lights

1.Yellow, 3W, Wave-length : 570-590nm (FR:508-526 THz)

2.Blue, 1W, Wave-length : 476~495nm (FR:606-630 THz)

3.Red, 1W, Wave-length : 620~750nm (FR:400-484 THz)

**Suggested Mixed Wave-Length & Paint Color
(Rotary Button 1-5 level in Lumiance)**

Black Paing : Full Yellow

Yellow Paint : 5 Yellow+3 Blue

White Paint : 5Red+ 5Yellow


Red Paint : 5 Yellow +5 Blue

Silver Paint : 3Red +5 Yellow+ 3Blue

Mix Lighting Images



Blue,1W Yellow,3W Red, 1W

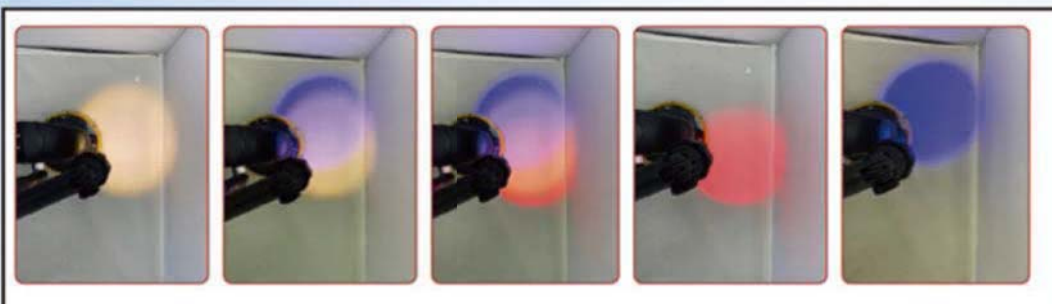

LWL-5118SGL

18W COB LED SLIM LIGHT



Instruction :

1. Push button switch:
button once: light on with 50% brightness
button twice: light on with full brightness
button three times: the light goes out
2. 18650 Li-ion 3.6V Rechargeable Battery.
3. Charging Battery – use Type-C USB charger and USB cord connected to the USB charging port and then plug into socket for re-charging.
4. LED Charging Indicator :
Light On – in charging
Red Light Blink – low battery
5. Product Size: 305(L) X 28(W) X 25(H) mm Weight : 170G

Caution :

- A. LED Max power: 520/170 Lumens 18W COB LED
- B. Power output: 5.0V 1000 mAh
- C. 5V Charger time: 1hr 50min (5V1A) 1hr 15min (5V2A)
- D. Active time: 3hr (100% power) 6hr 30min (50% power)
- E. Storage temperature: -20°C to 70°C
- F. Operation temperature: -5°C to 50°C
- G. Charger input: AC100~240V 50/60Hz.
- H. Keep the LED light away from fire / water or heat / damp place.
- I. Do not immerse the LED light in water / solvent .
- J. Do not shine the LED light directly on anybody's eyes.

MULTI-FUNCTION TWO-COLOR LED WORKING LIGHT



LWL-9880WU, Two-color 10W COB Light Board, One color - white, Another color - UV light

LWL-9880WR, Two-color 10W COB Light Board, One color - white, Another color - red flashing warning light



Engine interior refrigerant detection by UV light. light.



Engine room lighting by white light



Red flashing warning light

Specification

Item No	LWL-9880WU	LWL-9880WR
Quantity of COB LED:	10W	10W
Lithium Battery 18650A	3.7V / 3350mAh	3.7V / 3350mAh
Lighting up	3.5H (full light) / 6H(micro light)	3.5H (full light) / 6H(micro light)
Distance illumination of 50m (8W)	620 Lumen / 1000 Lux (White)	620 Lumen / 1000 Lux (White)
Yellow / White mixed light	*	620 Lumen / 170 Lux (Red)
IP	IP54	IP44
Frequency	50/60Hz	50/60Hz
L*W*H (mm)	470*50*42	230*30*40
Weight	280g	145g

MULTI-FUNCTION TWO-COLOR AND MONOCHROME LED WORKING G LIGHT




LWL-9880, Monochrome 10W COB light board, monochrome- white



LWL-9880WY, Two-color 20W COB light board, one color - white, Another color - yellow light. Used in the vehicle surface fine lines of irradiation, to determine whether the surface polishing is flat / bright.



Engine room lighting

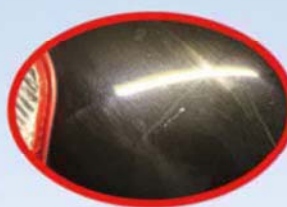

vehicle surface fine lines of irradiation by LWL-9880WY

Specification

Item No:	LWL-9880	LWL-9880WY
Quantity of LED:	20W	10W
Lithium Battery 18650A:	3.7V / 3350mAh	3.7V / 3350mAh
Lighting up:	3.5H (full light) / 6H(micro light)	3.5H (full light) / 6H (micro light)
Distance illumination of 5cm :	880 Lumen / 1300 Lux (White)	620 lumen / 1000 Lux (White)
Yellow / White mixed light:	*	600 lumen / 950 Lux (Yellow)
	*	770 lumen / 1400 Lux
IP:	IP54	IP44
Frequency:	50/60Hz	50/60Hz
L*W*H (mm):	470*50*42	230*10*40
Weight:	280g	145g

COB LED WORKING LIGHT

with Rechargeable Lithium Battery & Magnetic



Left or Right



HOOK

USB

Control Knob



LWL-9470Y

15W COB LED Working Light (yellow)

LWL-9470

15W COB LED Working Light (white)



LWL-5641

8W COB LED Working Light



Control Knob



USB



LWL-5800

5W LED Working Light



LWL-8800

8W COB LED Working Light

Specification

Item No.	LWL-9470/ LWL-9470Y	LWL-8800	LWL-5800	LWL-5641
Quantity of LED	15W COB LED	8W COB LED	5W LED	8W COB LED
Lithium Battery	3.7V 2200mAh	3.7V 2200mAh	3.7V 2200mAh	3.7V 2200mAh
Lighting up	2.5H(full light) 6H (micro light)	2.5H(full light) 6H (micro light)	2.5H(full light) 6H (micro light)	2.5H(full light) 6H (micro light)
Distance illumination of 50 cm	935 LUX /58 LUM	450 LUX / 280 LUM	450 LUX /260LUM	450 LUX / 318 LUM
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 /60 Hz
L*W*H (mm)	375*45*35	345*38*33	380*38*33	210*26*28
Weight	200g	226g	230g	127g

8W MULTI-FUNCTION LED WORKING LIGHT LWL-8740 & LWL-8740UV



Specification

Item No	LWL-8740	LWL-8740UV
Quantity of COB LED:	8W	8W
Lithium Battery 18650A	3.7V / 2200mAh	3.7V / 2200mAh
Distance illumination of 50cm (8W)	400 Lumen	400 Lumen
3W Tip Light	White	White
Charger Time	3.5~4.0 hours	3.5~4.0 hours
Active Time	3 hours	3 hours
IP	IP44	IP44
Frequency	50 / 60Hz	50 / 60Hz
L*W*H (mm)	230*30*40	230*30*40
Weight	145g	145g



WHIRLWIND TOOLS CO., LTD.

E-MAIL : info@whirlwindtools.com WEBSITE : www.whirlwindtools.com

TEL : +886-2-2692-6399

FAX : +886-2-2694-6867

ADDRESS : No. 12, Lane 35', Fude 1st Road, Xizhi Dist., New Taipei City 22149, Taiwan

